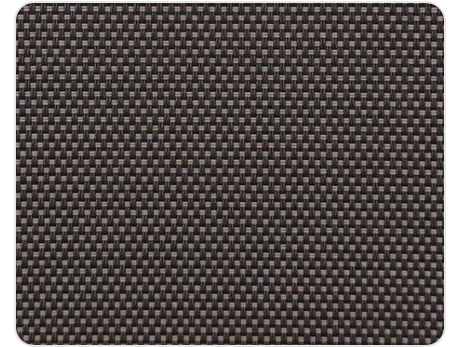


# Sunscreen Collection


**Solar Screen** 1%, 3% and 5% openness


High-performance solar screen fabrics woven from 30% polyester and 70% PVC. Available in three openness factors to balance glare control, heat reduction, and outward visibility, in a clean, architectural finish for contemporary interiors.

## 1%

Page 2

Maximum glare control with clear outward visibility.

## 3%

Page 3

Balanced glare and heat reduction with natural light.

## 5%

Page 4

Gently filtered sunlight with a brighter, more open feel.

### Collection overview

| Property           | Sunscreen 1%                                                               | Sunscreen 3%                                     | Sunscreen 5%                                     |
|--------------------|----------------------------------------------------------------------------|--------------------------------------------------|--------------------------------------------------|
| OPENNESS FACTOR    | 1%                                                                         | 3%                                               | 5%                                               |
| WEIGHT (± 5%)      | 13.86 oz/yd <sup>2</sup> (470 g/m <sup>2</sup> )                           | 12.96 oz/yd <sup>2</sup> (440 g/m <sup>2</sup> ) | 12.08 oz/yd <sup>2</sup> (410 g/m <sup>2</sup> ) |
| THICKNESS (± 5%)   | 0.028" (0.70 mm)                                                           | 0.026" (0.65 mm)                                 | 0.022" (0.55 mm)                                 |
| COMPOSITION        | 30% Polyester + 70% PVC                                                    |                                                  |                                                  |
| WEAVE              | Basket 2x2                                                                 |                                                  |                                                  |
| COLOR FASTNESS     | Class 8 (ISO 105-B02)                                                      |                                                  |                                                  |
| STANDARD PACKAGING | 33 yd (30 m) rolls                                                         |                                                  |                                                  |
| AVAILABLE WIDTHS   | 98" and 118" (250 cm, 300 cm)                                              |                                                  |                                                  |
| CUTTING            | Ultrasonic and crush blade                                                 |                                                  |                                                  |
| WELDING            | 392 °F (200 °C), 12-15 s                                                   |                                                  |                                                  |
| FIRE RESISTANCE    | NFPA 701                                                                   |                                                  |                                                  |
| COLORS             | White, White/Linen, White/Gray, Tan, Light Gray, Gray, Black/Bronze, Black |                                                  |                                                  |

### Certifications



OEKO-TEX® Standard 100



REACH Compliant



UL GREENGUARD Gold



ISO/TS 16949 (SGS)



Lead-free




5-Year Warranty

### SUNLO

10890 Quail Roost Dr Unit 38-39  
 Cutler Bay, Florida 33157 United States  
 sales@sunlo.com | +1 (305) 981-2294 | www.sunlo.com

# Sunscreen 1%

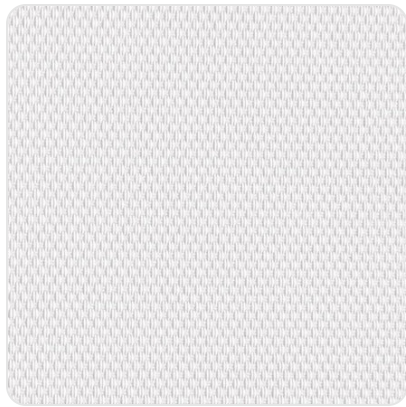
**Solar Screen**


White | SKU S-8985

## Description

Sunscreen 1% is designed for maximum glare control while preserving clear outward visibility. With a 1% openness factor, it significantly reduces heat and harsh sunlight, helping create a cooler, more comfortable interior environment. This fabric maintains a modern, architectural look while allowing natural light to enter in a controlled way.

### IDEAL FOR

**Offices | Living spaces | Large windows | Strong sun exposure**

## Technical data

|                 |                                                       |                    |                         |
|-----------------|-------------------------------------------------------|--------------------|-------------------------|
| OPENNESS FACTOR | 1%                                                    | COMPOSITION        | 30% Polyester + 70% PVC |
| WEAVE           | Basket 2x2                                            | COLOR FASTNESS     | Class 8 (ISO 105-B02)   |
| WEIGHT          | 13.86 oz/yd <sup>2</sup> (470 g/m <sup>2</sup> ) ± 5% | THICKNESS          | 0.028" (0.70 mm) ± 5%   |
| WIDTH           | 98", 118" (250 cm, 300 cm)                            | STANDARD PACKAGING | 33 yd (30 m)            |
| CUTTING         | Ultrasonic and crush blade                            | WELDING            | 392 °F (12-15 s)        |
| FIRE RESISTANCE | NFPA 701                                              | TYPE               | Solar Shades            |

## Color range

8 colors | SKU shown below each color


**White**  
S-8985

**White/Linen**  
S-7366

**White/Gray**  
S-1560

**Tan**  
S-1372


**Light Gray**  
S-6397

**Gray**  
S-7699

**Black/Bronze**  
S-8999

**Black**  
S-7668


## Certifications

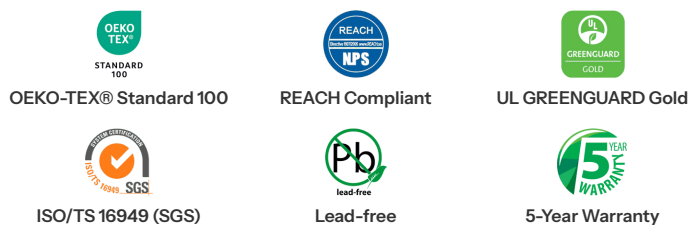

## Care & maintenance

- **Regular dusting.** Dust with a microfiber cloth or vacuum with a brush attachment to prevent buildup.
- **Lint roller.** For quick touch-ups, use a lint roller to remove lint or small particles.
- **Avoid harsh chemicals.** No bleach, strong detergents, or abrasive tools; they can damage the fabric and color.
- **Loose threads.** Do not pull or tear frayed edges; trim carefully with scissors.

# Sunscreen 3%

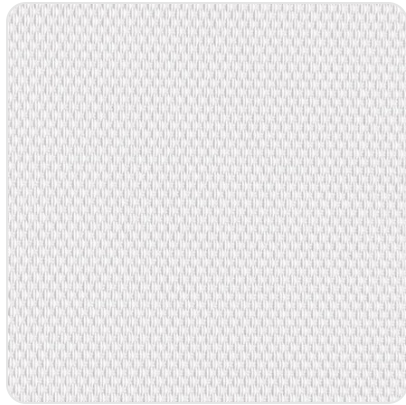
**Solar Screen**


White | SKU S-7320

## Description

Sunscreen 3% is designed to reduce glare and heat while maintaining a balanced level of natural light and outward visibility. With a 3% openness factor, it filters sunlight effectively without darkening the space, creating a comfortable and productive environment. Its clean, architectural appearance complements modern interiors while supporting energy efficiency and visual comfort.

## IDEAL FOR

**Offices | Living areas | Moderate sun exposure**

## Technical data

|                        |                                                           |                           |                                |
|------------------------|-----------------------------------------------------------|---------------------------|--------------------------------|
| <b>OPENNESS FACTOR</b> | <b>3%</b>                                                 | <b>COMPOSITION</b>        | <b>30% Polyester + 70% PVC</b> |
| <b>WEAVE</b>           | <b>Basket 2x2</b>                                         | <b>COLOR FASTNESS</b>     | <b>Class 8 (ISO 105-B02)</b>   |
| <b>WEIGHT</b>          | <b>12.96 oz/yd<sup>2</sup> (440 g/m<sup>2</sup>) ± 5%</b> | <b>THICKNESS</b>          | <b>0.026" (0.65 mm) ± 5%</b>   |
| <b>WIDTH</b>           | <b>98", 118" (250 cm, 300 cm)</b>                         | <b>STANDARD PACKAGING</b> | <b>33 yd (30 m)</b>            |
| <b>CUTTING</b>         | <b>Ultrasonic and crush blade</b>                         | <b>WELDING</b>            | <b>392 °F (12-15 s)</b>        |
| <b>FIRE RESISTANCE</b> | <b>NFPA 701</b>                                           | <b>TYPE</b>               | <b>Solar Shades</b>            |

## Color range

8 colors | SKU shown below each color


**White**  
S-7320

**White/Linen**  
S-5063

**White/Gray**  
S-2923

**Tan**  
S-4259

**Light Gray**  
S-3185

**Gray**  
S-5753

**Black/Bronze**  
S-3405

**Black**  
S-5463


## Certifications



## Care & maintenance

- **Regular dusting.** Dust with a microfiber cloth or vacuum with a brush attachment to prevent buildup.
- **Lint roller.** For quick touch-ups, use a lint roller to remove lint or small particles.
- **Avoid harsh chemicals.** No bleach, strong detergents, or abrasive tools; they can damage the fabric and color.
- **Loose threads.** Do not pull or tear frayed edges; trim carefully with scissors.

# Sunscreen 5%

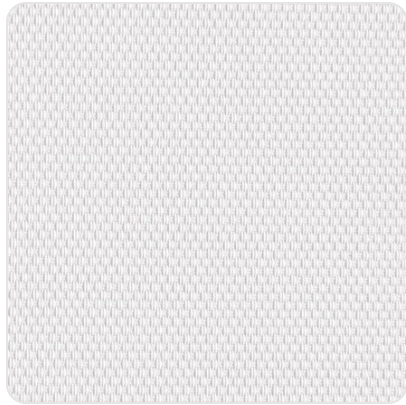

White | SKU S-8028

## Description

Sunscreen 5% is designed to gently filter sunlight while preserving a brighter, more open feel. With a 5% openness factor, it allows more natural light into the space while still reducing glare and heat for everyday comfort. This fabric maintains clear outward visibility and a clean, modern appearance that fits seamlessly into contemporary interiors.

## IDEAL FOR

Living areas | Offices | Moderate sun exposure

## Technical data

|                 |                                                       |                    |                         |
|-----------------|-------------------------------------------------------|--------------------|-------------------------|
| OPENNESS FACTOR | 5%                                                    | COMPOSITION        | 30% Polyester + 70% PVC |
| WEAVE           | Basket 2x2                                            | COLOR FASTNESS     | Class 8 (ISO 105-B02)   |
| WEIGHT          | 12.08 oz/yd <sup>2</sup> (410 g/m <sup>2</sup> ) ± 5% | THICKNESS          | 0.022" (0.55 mm) ± 5%   |
| WIDTH           | 98", 118" (250 cm, 300 cm)                            | STANDARD PACKAGING | 33 yd (30 m)            |
| CUTTING         | Ultrasonic and crush blade                            | WELDING            | 392 °F (12-15 s)        |
| FIRE RESISTANCE | NFPA 701                                              | TYPE               | Solar Shades            |

## Color range

8 colors | SKU shown below each color


 White  
S-8028

 White/Linen  
S-3049

 White/Gray  
S-4637

 Tan  
S-7863

 Light Gray  
S-2986

 Gray  
S-2201

 Black/Bronze  
S-6928

 Black  
S-3561

## Certifications



## Care & maintenance

- **Regular dusting.** Dust with a microfiber cloth or vacuum with a brush attachment to prevent buildup.
- **Lint roller.** For quick touch-ups, use a lint roller to remove lint or small particles.
- **Avoid harsh chemicals.** No bleach, strong detergents, or abrasive tools; they can damage the fabric and color.
- **Loose threads.** Do not pull or tear frayed edges; trim carefully with scissors.